


# Certéna Art

## Certéna Art ITC / HS Petite / Certéna Art ITC / HS dAZ Petite


### Technical Data

#### Ear simulator data

EN / IEC 60118 and IEC 60711




#### Output sound pressure level

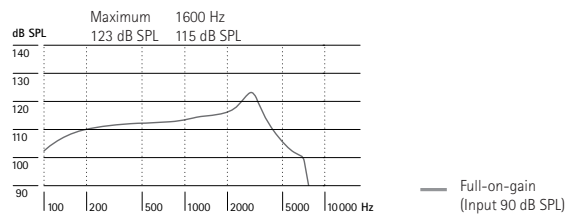

Canal/half shell, battery size 312 (for fitting range, product details, and available options, please see "Certéna Art Product Information" or visit [www.phonakpro.com](http://www.phonakpro.com)).

Certéna Art Petite devices do not have wireless functionality but support remote controls like KeyPilot2/WatchPilot2. Unless otherwise specified, all data obtained are measured with 5 mm tubing and iPFG measurement settings.


#### Acoustic gain

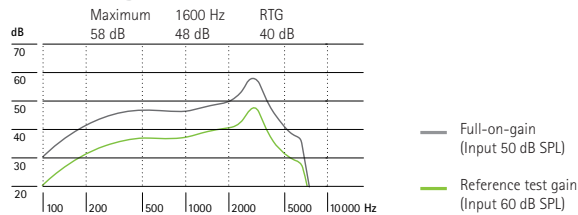

Note: Measurements with pure tones of a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not reflect the actual performance with naturally occurring broadband input signals.

Frequency range (DIN 45605)	150 Hz – 6800 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	2.0%	1.5%	1.5%
Battery current	Quiescent	Working	
	1.1 mA	1.2 mA	
Equivalent input noise level	19 dB SPL		

#### Induction coil sensitivity

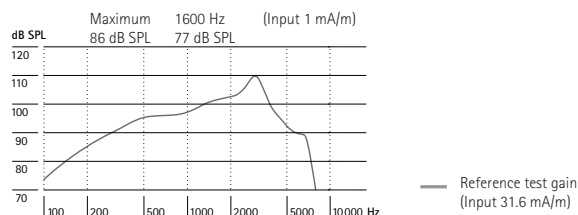

#### Dynamic data

Compression	Attack time	Recovery time
	1 ms	50 ms


**PHONAK** life is on




## 2cm<sup>3</sup> coupler data

ANSI S3.22-2003


### Output sound pressure level

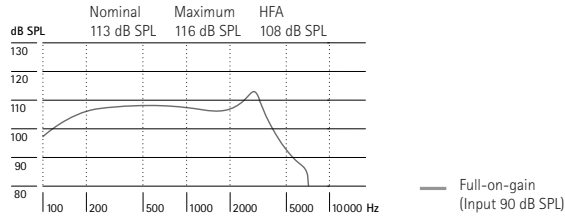

### Input / Output characteristics at 2000 Hz

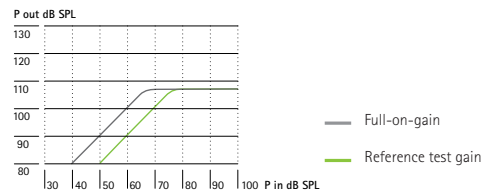


### Acoustic gain

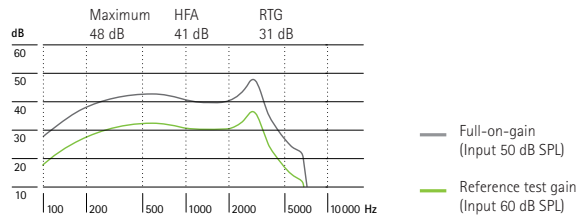

Frequency range (DIN 45605)	< 100 Hz – 6600 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	1.0%	1.0%
Equivalent input noise level	19 dB SPL		

### Induction coil sensitivity

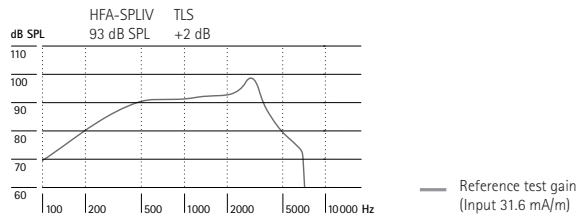

### Dynamic data

Compression	Attack time	Recovery time
	1 ms	50 ms